

Adjustable Mounting System

MS-ASM4X2H / MS-ASM3X2V



Solar Mounting MS-ASM is an adjustable ground mounting system from 10° to 40°, and we have 2 kinds of ground foundation fit the different kinds of ground.

The node connected parts will be produced in the factory, so there is no need to do some welding jobs during the installation.


The structural materials are hot dip galvanized steel, aluminum 6063-T5, 304 stainless steel and so on to keep the warranty is 10 years, the service life can be reach as long as 25 years to fit the requirements of solar plants.

Specifications

MODEL	MS-ASM4X2H / MS-ASM3X2V
The installation environment	Open ground and square
System structural materials	Hot dip galvanized steel, aluminum, stainless steel
Suitable system temperature	-50°C~100°C
Wind resistance	60m/s
Panel angel	10° , 20° , 30° , 40°
Snow load	1.6KN/m ²
Component orientation	Horizontal or vertical
Solar panel type	Frame or frameless
Color	Silvery white
Service life	25 years

Dimensions

MODEL	MS-ASM4X2H	MS-ASM3X2V
① Column	1450 mm	1250 mm
② Vertical pipe	2500 mm	1950 mm
③ C steel pipe	3100 mm	3100 mm
④ Guide rail	4150 mm	3150 mm

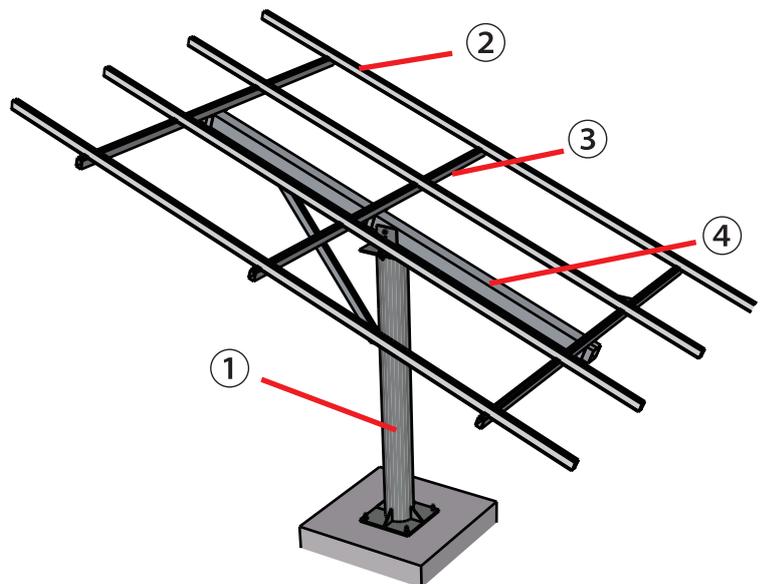

MASAMITSU CO., LTD

2059-102 Takehara Otsuka Miyazaki, Miyazaki 880-0951 Japan

TEL : +81-985-41-6668 FAX : +81-985-41-6669

E-mail : info@mnes.jp URL : www.mnes.jp